
EBECO

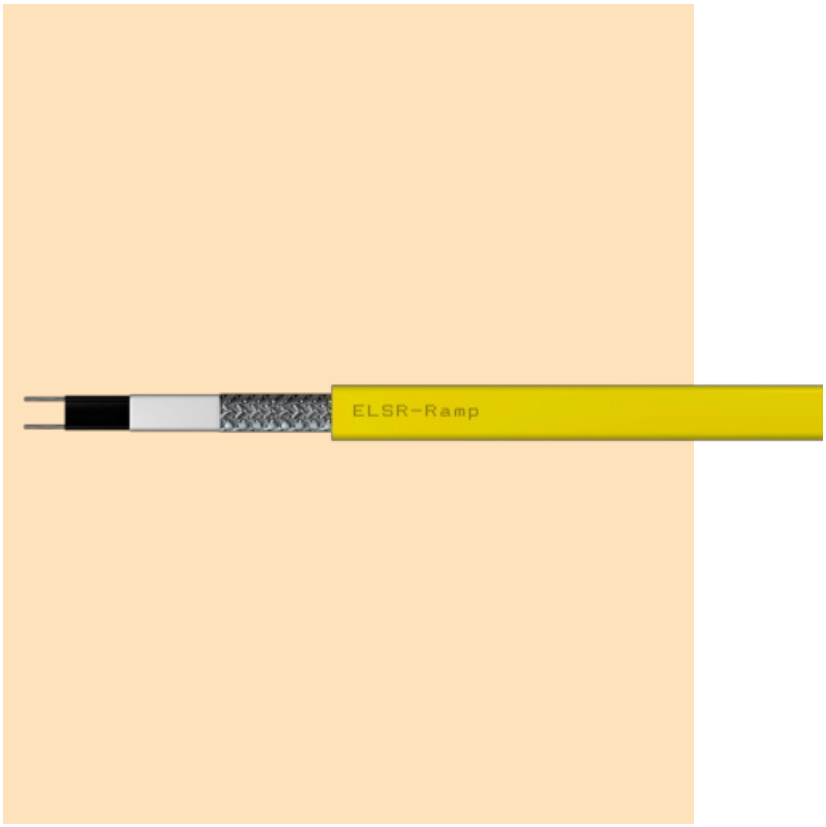

ELSR-Ramp

Self-regulating heating cable

Usage

- For snow melting, ground
- Laid in a sand bed or embedded in concrete
- 100 ºC
- 80 °C
- Cable

- High power per meter
- Can be cut during installation for good fit
- Can be crossed during installation

The self-regulating heating cable ELSR-Ramp is intended for embedding in concrete for outdoor snow melting, such as in parking garages, ramps, and stairs.

Specifications

Specification	Data

Specification	Data
Connection voltage	230 V
Number of conductors	2 pcs
Bending radius, min.	50 mm
Output	50 W/m at 10 ºC, 110 W/m at 5 ºC (embedded in concrete)
Exposure temperature (power off), max.	100 ºC
-BO	Protective conductor: Braided, Outer casing: TPE
Contains SVHC substances according to REACH	No
Installation temperature, min.	-20 ºC
Insulation material outer	TPE
Cable type	Self-regulating 2-conductor with screen
Conductor area	2,77 mm²
Exposure temperature (power on), max.	Up to 80 ºC

Documents

- **CE document**
- **Manual**
- **Power requirement for snow melting**
- **Eltherm Data Sheet**

Warranty

The general terms of delivery are listed below.

Our warranty terms

Article list

Article number	Description	Dimensions W x H (mm)	Exposure temperature (power on), max. (ºC)	Output (W/m at 10° C)
8936032	ELSR-Ramp-50-2-BO	17.2 x 9.5	80	50


Supplementary products



ELTC-21



Splice kit ELVB-SRV-Ramp

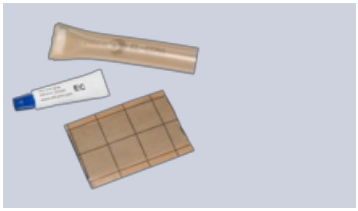

Termination kit EL-ECRA

Learn more about this product: https://www.ebeco.com/en/products/snow-melting-ground/elsr-ramp